Part II

Instl. [illegible]

DEV (1947) Department.

Ms SERIES.

G.O. No. 4786

Dated 7-10-47

[Despatch Abstract.]

Industries Department - G.S.T. Colleges
Construction of a Princess Veda
at the Work block of Bhowkidars
Quarters - Expenditure - Sanctioned

DEPARTMENT OF INDUSTRIES AND COMMERCE

No.3709.D/47 dated 16th September, 47

8938(47-1)
2274)

To

The Director of Industries and Commerce,
Chepauk, Triplicane, M A D R A S.

The Secretary to Government,
Development Department, M A D R A S.

Sir,

Sub: Government Silk Filatures, Kollegal
Repairs to the wall of Chowkidar's
quarters.

---

p13 of (J.)

In G.O.No.MS.4167, Development, dated 25-8-1947, Government sanctioned the incurring of an expenditure of Rs.90/- for the repair of the western side wall of the East block of the Chowkidar's quarters.

The General Manager, Government Silk Filatures has since reported that, due to the recent heavy rains, the side wall of the West block of the Chowkidar's quarters has settled down. I enclose an estimate for Rs.90/- for providing a buttress wall and I request that Government may be pleased to sanction the expenditure.

In view of the urgency of the work, I am asking the General Manager, Government Silk Filatures to have the repairs carried out in anticipation of Government sanction and request that my action in this regard may be approved.

The expenditure is debitable to "85.A. Capital outlay on provincial schemes of State Trading etc. -8 Other charges (ii) Miscellaneous expenses.

S. R. Sankaran.

VSn. for Director of Industries and Commerce

Estimate Detailed Measurement Sheet

Name of work. Repairs to the Watchmans quarters - Provanga both on the east side of West block of Chronicles in ters - GSF Kottegal

Details of work	Number	Measurements in Feet Length	Breadth	Depth	Area or Contents	Total
1) Earth work excavating foundation etc in hard Soil.						
Foundation & Buttress wall	1	3-6	4-9¼	5-0	73	
Total —						≈ 100 Sft
2) Concrete broken stone in lime mortar 1:2						
Found - Buttress wall	1	3 6	3-9	1-6	20	
Total —						≈ 20 Cft
3) Brick Work in lime mortar with country bricks						
Foundation footing	2	2-7½	3-6¾	1-6	12	
2nd	1	2-3	3-4½	1-0	8	
Basement-	1	1 10½	3-2¼	1-0	6	
Superstructure	1	1-6	3-0+1-0 / 2	13-0	39	
Total —					65	≈ 70 Cft
4) Plastering with Cement mortar 1:5 ½" thick						
Floor face	1	1-6		13-0	20	
Sides	2	3+1 / 2		13-0	52	
Top	1	1-6		1-0		
basement-	1	8-3		1-2¼	10	
Total —					84	≈ 100 Sft
5) Cut-Stone 2 lines dressed to regular faces & fixed in Cement mortar 1:3						
Door Stone	2	3-0	1-0	0-4"	2-00	Cft
& Dat —					—	2-00
6) Filling in Cracks with bricks &c					LS	5/-

G. Abdul Azeez,
S.O. Civil Works.

[signature]
SDO. Supervisor

Abstract of Estimate

Quantity	Particulars of work	S.of Number	Rate per	Amount	Rs	Cs
100 Sft.	1) Earth work excavating foundation trench hard soil		15 to . 090 Sft.	. 2		
20 Sft.	2) Concrete bottom Stone lime concrete	"	66 " - .00 Sft.	13		
70 Sft.	3) Rock work in lime cr "	"	67 8 -	47		
100 Sft.	4) Plastering with cement-sand 1:3 ½" thick		10 4 - 100 Sft.	10		
2 Sft.	5) White Stone 2 nos. arch voussoir arch with cement mortar 1:3		2 4	9		
LS	6) Filling in Coarse with boulders		LS	5		
				86		
	Contingencies & petty Supervision Charges			14		
				4 - -		
				90 to 0 - -	90	/-
				or	Rs. 90	/-

Rupees Ro.

G. Abdul Azeez,
S.O. Civil Works

Ex. Engineer

CHOWKIDAR'S QRS. (West Block)
G.S.F. KOLLEGAL.

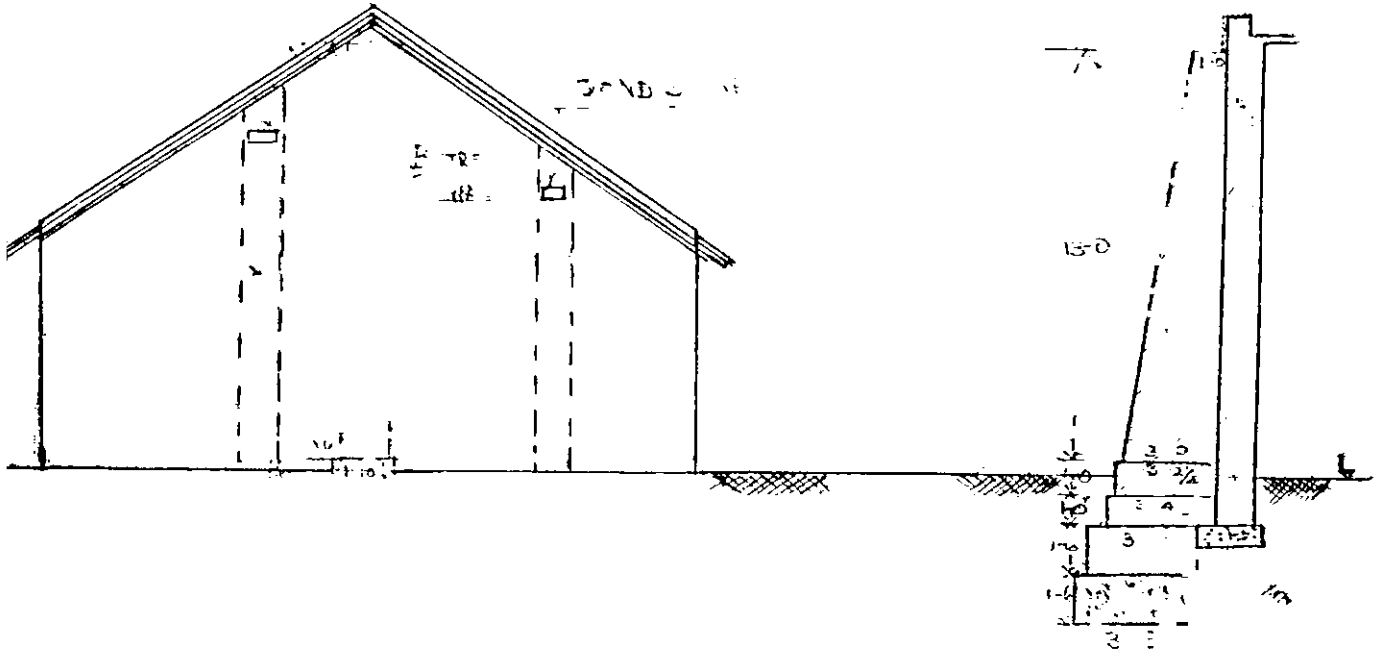

ELEVATION

G. Abdul Azeez,
S.O. Civil Works.

Lt. Manager

Revenue
W 7.10. 179/91X

DRAFT FOR APPROVAL.

Date. Initials.

SUBJECT:— Industries — Sericulture — Govt Silk Filatures, Kollegal — Construction of a buttressing wall in the West block of ~~wall~~ Cheruvidar's quarters — Expenditure — Sanctioned

When received for fair copying ..		
When copied ..		
When examined ..		
When signed ..		
When despatched.		

READ AGAIN G.O. No. 4167 Ms. Dr. dated 25-8- 1947.

" " " " 19

READ ALSO:—

Letter C No. 899804/47 from the D I & C, No. 3709 D/47 dated 16-9- 1947.

" " " " " " 19

" " " " " " 19

Order Ms. No. 4786. dated 9. 10. 1947.

H.E. the Governor of Madras permits the D I & C to incur an expenditure not exceeding Rs 890/- (Rs ninety only) on the construction of a buttress wall, ~~the wall settled down owing to the recent heavy rains~~ in the west block of the Cheruvidar's quarters attached to the Govt Silk filatures, Kollegal.

The expenditure is debitable to "85A Capital Outlay on Provincial Schemes of State Trading — C. Other Miscellaneous schemes — J. Govt Silk filature, Kollegal — 8. Other charges — (11) Miscellaneous Expenses."

The action of the D I & C in having arranged to proceed with

the work in anticipation of the sanction of the Govt is approved.

(424 9-4) 24/9/47 — 25-9-47

To the D(Exp) & Addl Secy (Fin) Copy to SF to file

Noh

Please see the D(Exp)'s letter at pref and its enclosure. Subject to orders, a draft order is submitted above for approval. Finance may see for acceptance.

(424 9-4) 24/9/47 — 25-9-47

DW no no 89804-DT(W)-1 dt 25-9-47

Fin.

Finance (Exp C)

In the circumstances explained by the Director of Industries and commerce, on page 1 c.f, the draft order on pages 1-2 above may be accepted. (The expenditure involved is Rs 90/-) p10-9

30/9/47 — 1-10-47

1-10-47

Fin 2nd no 5757 6 Exp-1 dt 1-10-47

TO AS

DEVDEN

The draft order may now issue

(414-10-47) — 6/10/47

[Issued vide Govt No 47886 MS Rwd dt 9-10-47] AS 7-10-47